
III. ADVANCE GUIDE

3.1 Operation Principle

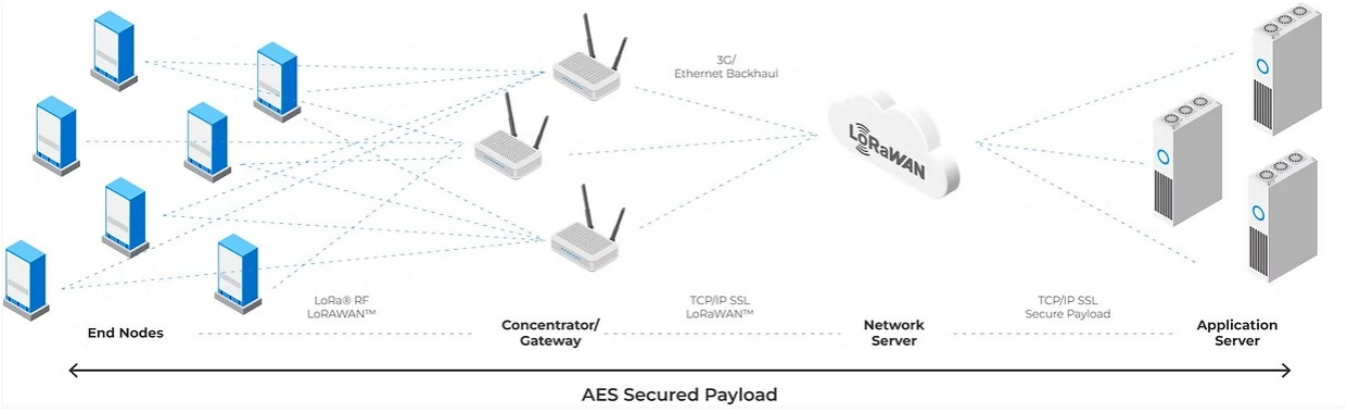

A LoRaWAN gateway functions as a transparent bridge between LoRa end devices and the LoRaWAN network server. It receives uplink packets from end devices via LoRa radio signals and forwards them to the network server over an IP-based backhaul (e.g., Ethernet, Wi-Fi, or cellular).
The gateway also receives downlink messages from the network server and transmits them to the appropriate end devices. It does not process or modify the payload data, ensuring secure and efficient communication between devices and the server.

3.2 Firmware update

3.2.1 Preparation


- Prepare a Windows PC.

- Prepare a USB-C cable for connecting the PC and the gateway.

- Download and unzip the firmware file


3.2.2 Download and Install Software


> Download & Install Win32DiskImage from **the link**

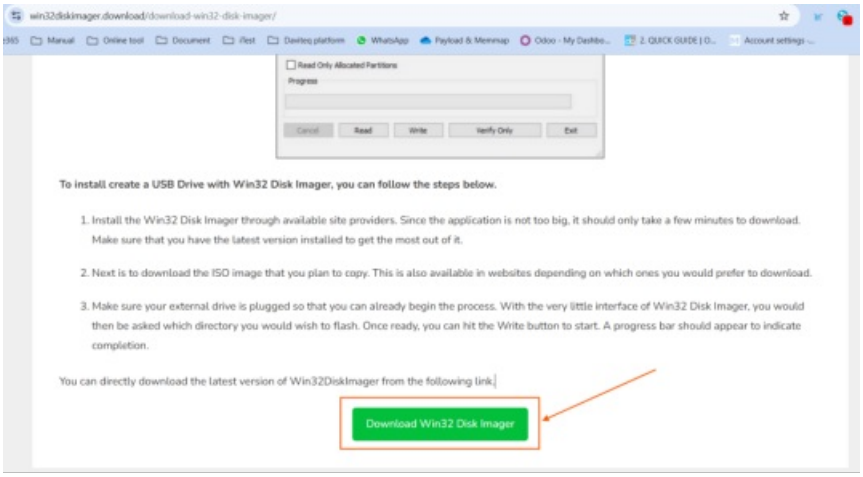

> Download & Install Raspberry USB Boot

> Visit **the link** and download ***rpiboot_setup.exe.*** *Then, install Raspberry USB Boot in the PC*

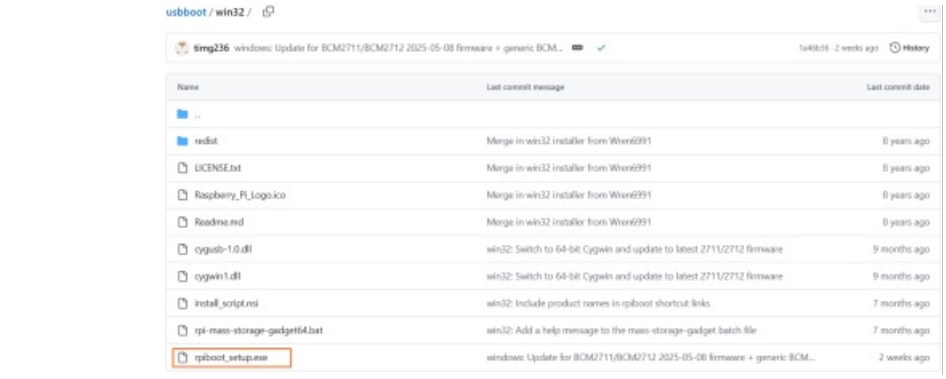


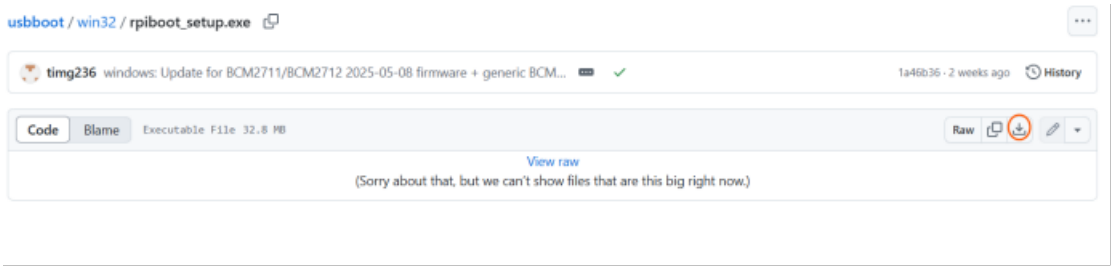


3.2.3 Flashing Firmware to PineX Gateway

Step 1: Make sure the gateway is completely powered off (all three LEDs are off).Use a screwdriver to remove the three screws and open the gateway cover. Then, remove the plastic cover to access the USB-C port.




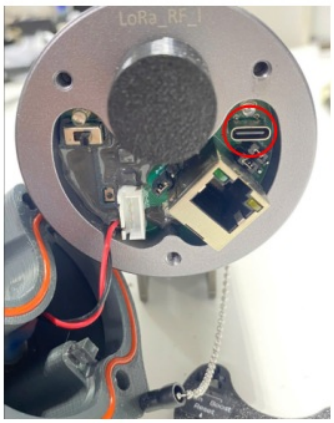


Step 2: Change the switch mode from **Run** to **Boost** as shown in the picture.

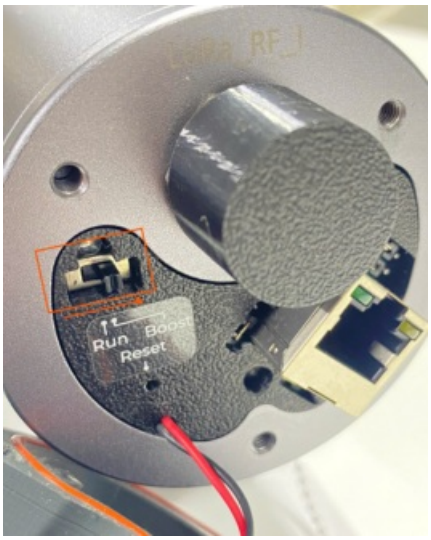


Step 3: Power on the gateway and wait for about 15 seconds. Then, connect the gateway to the PC via the USB-C cable.

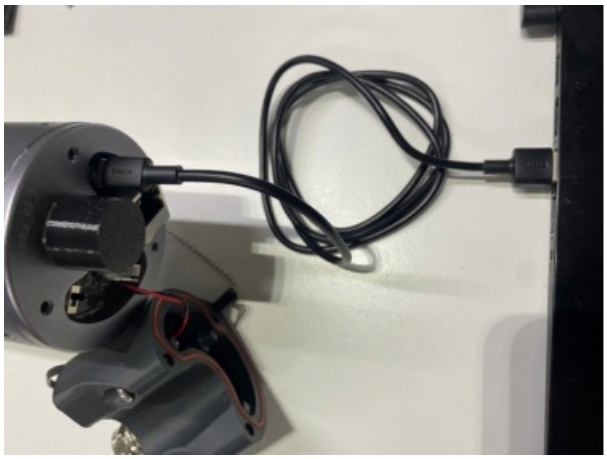

Step 4: Open **rpiboot-CM4-CM5-Mass Storage Gadget**.

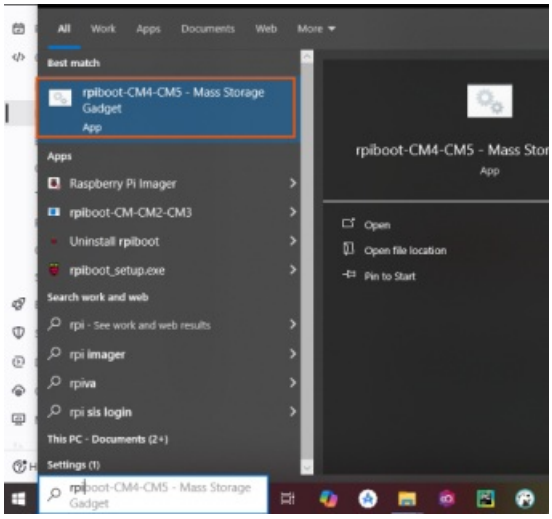

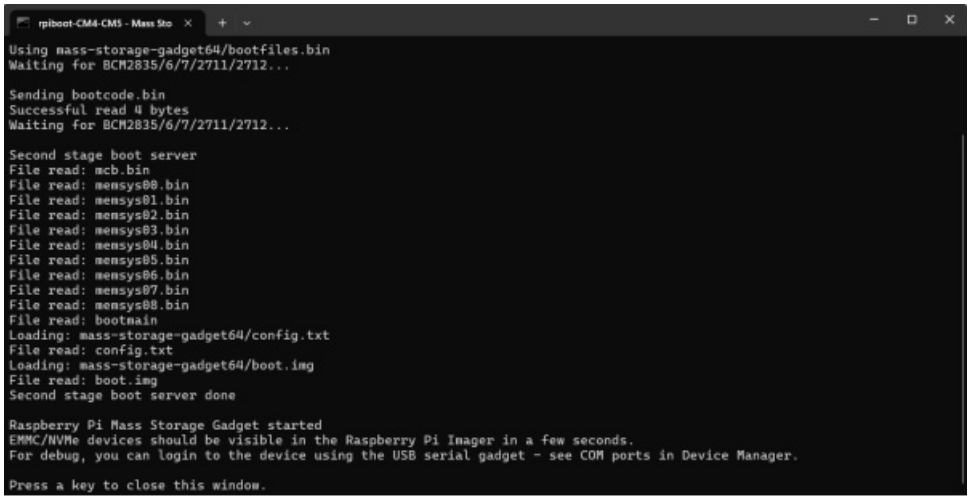


Open **This PC** on the PC and check whether a new drive named '**bootfs**" appears.


If "bootfs" appears as shown in the image below, the connection is successful.

If "bootfs" does not appear, go back and repeat the process from Step 1.


> ⚠ Take note of the drive letter assigned to "bootfs" — for example, Drive E:

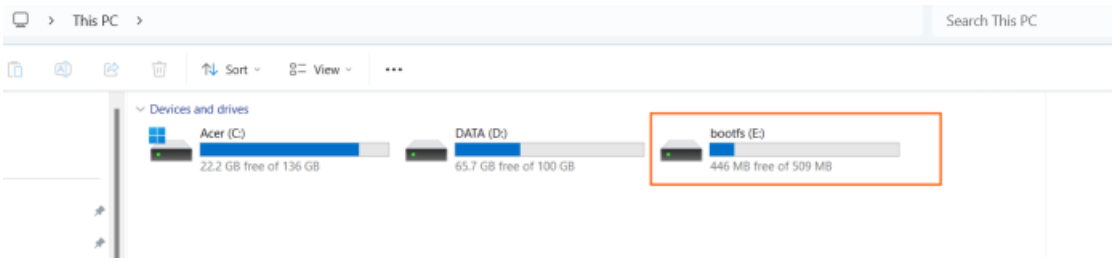

Step 5: Open **Win32DiskImage** software. Browse to the firmware file and select correct Device (the drive letter assigned to "bootfs" in step 4**).** Then click the Write button to flash the firmware to the gateway.

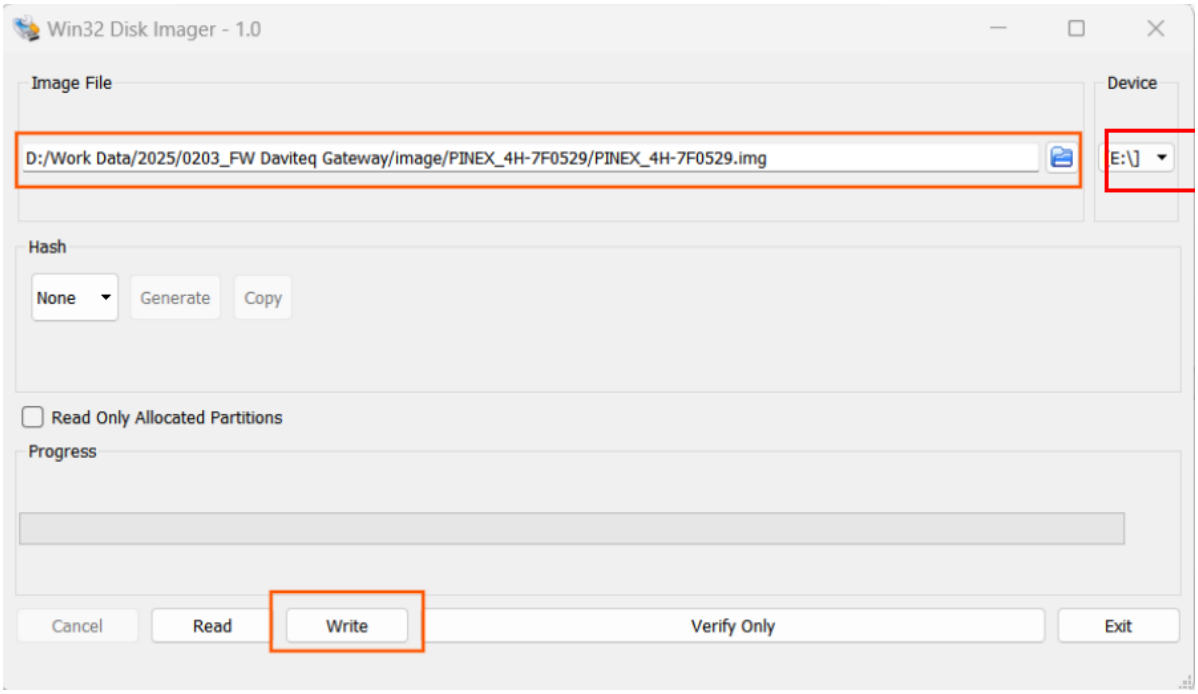

Wait a few minutes until a "Write successful" message is displayed. This means the firmware flashing process has completed successfully.

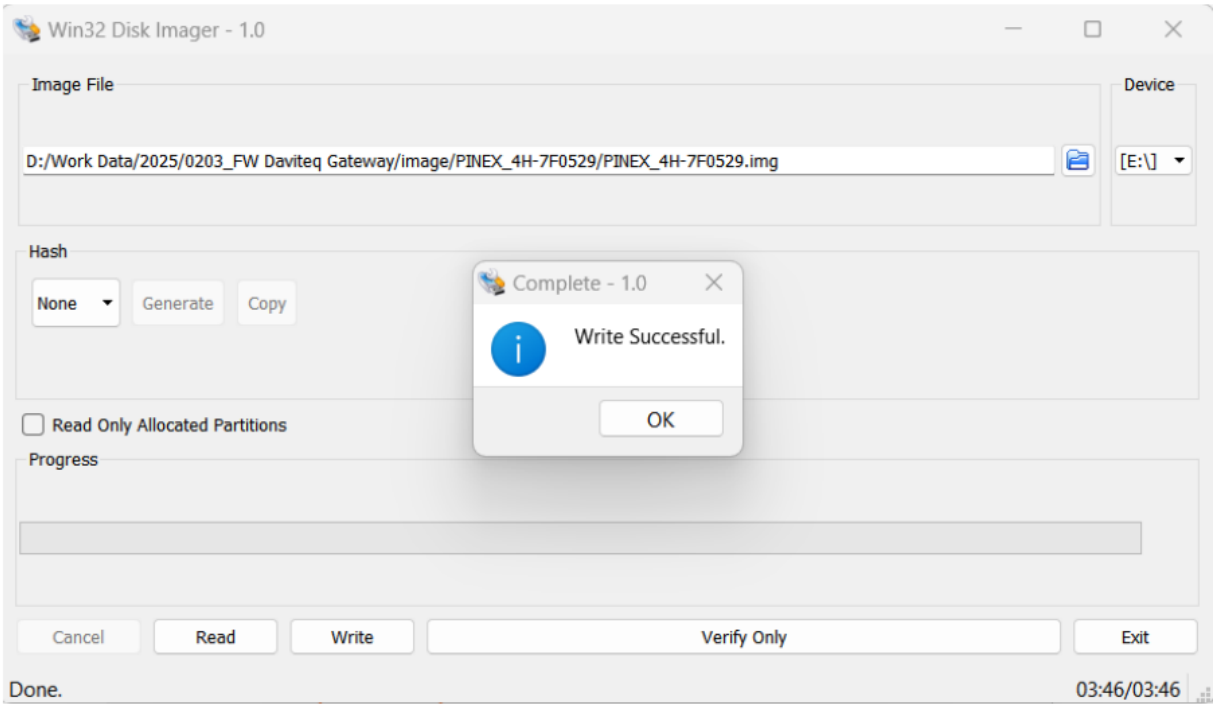

3.3 Connect directly from window PC to gateway through ethernet cable for

configuration

3.3.1 PREPARATION

Hareware


- A Daviteq gateway
- A window laptop
- A USB-to-LAN adapter (if the laptop does not have ethernet port)
- A traight ethernet cable

Software

Download and Install **Tftdp64** software (attached file)


3.3.2 DETAILED INSTRUCTIONS

Step 1: Type "**Network Connections**" in the search bar, then select "**View network connections**."

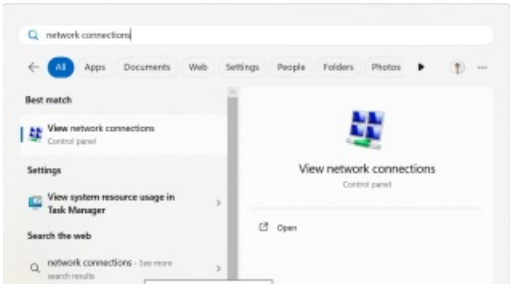




Step 2: Plug the USB-to-LAN adapter into the laptop. Wait for a few seconds, and the Ethernet connection of the adapter will appear.

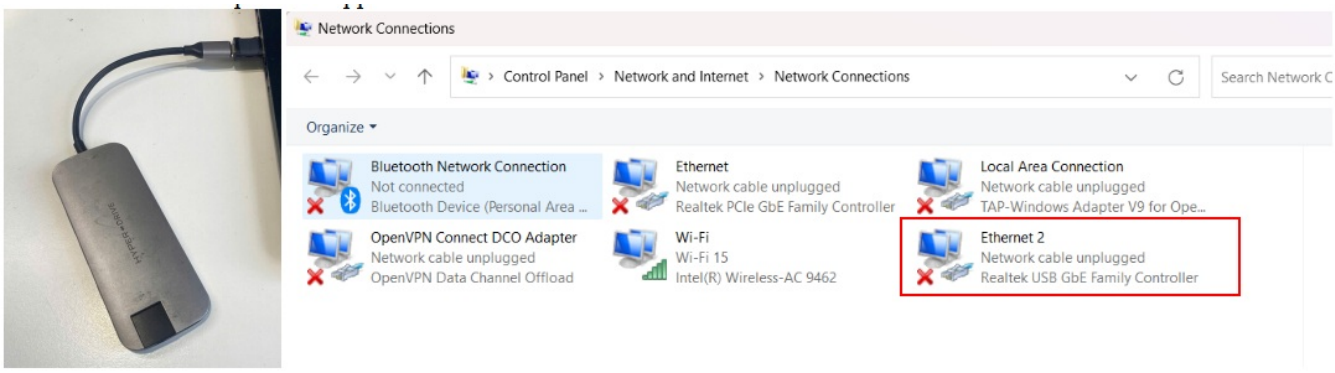

Step 3: Right click the Ethernet connection of the adapter, then select**Properties**

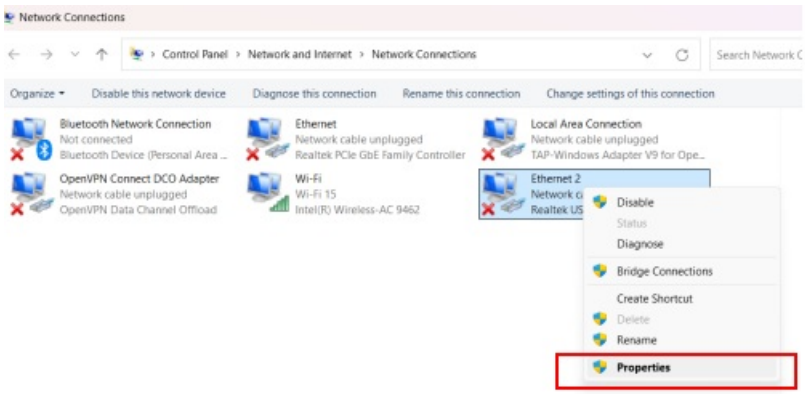


Step 4: In the **Networking** tab, select **Internet Protocol Version 4(TCP/IPv4).**

Then, select **Use the following IP address** and input the imformation as shown in the picture below


IP address : 192.168.10.1

Subnet mask: 255.255.255.0

Press **OK** button to save the configuration

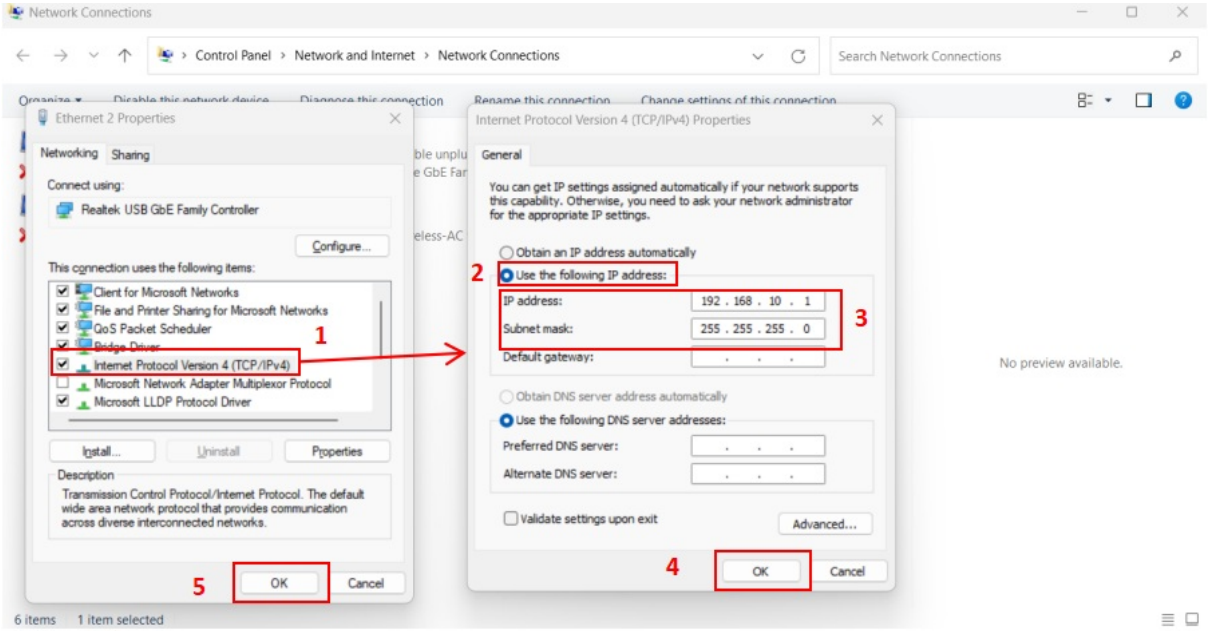


Step 5: Run **Command Prompt** as administrator

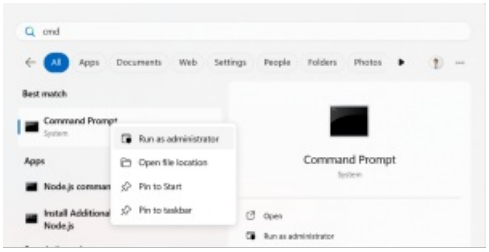


Copy and paste command below to the Command Promt to temporarily turn off the Firewall

netsh advfirewall set allprofiles state off

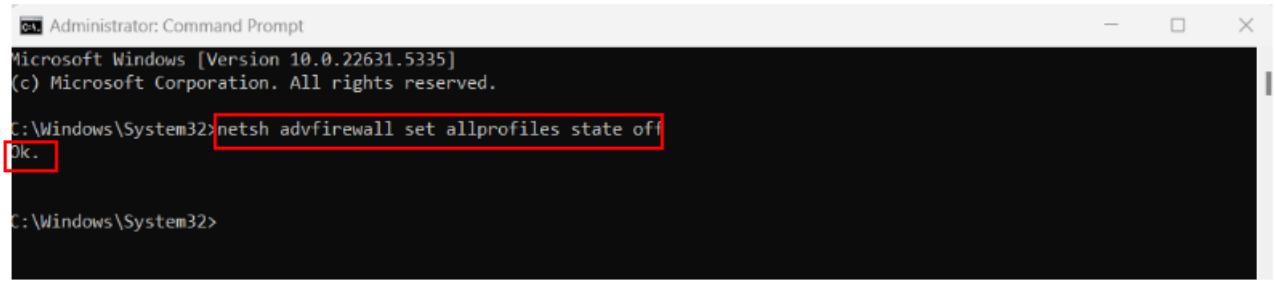


Step 6: Open the **Tftpd64** Software, click the **Settings** button, then configure it as shown in the pictures below. After that, click OK to save the new settings.

(Only change the settings in the red box, leave the rest as default)

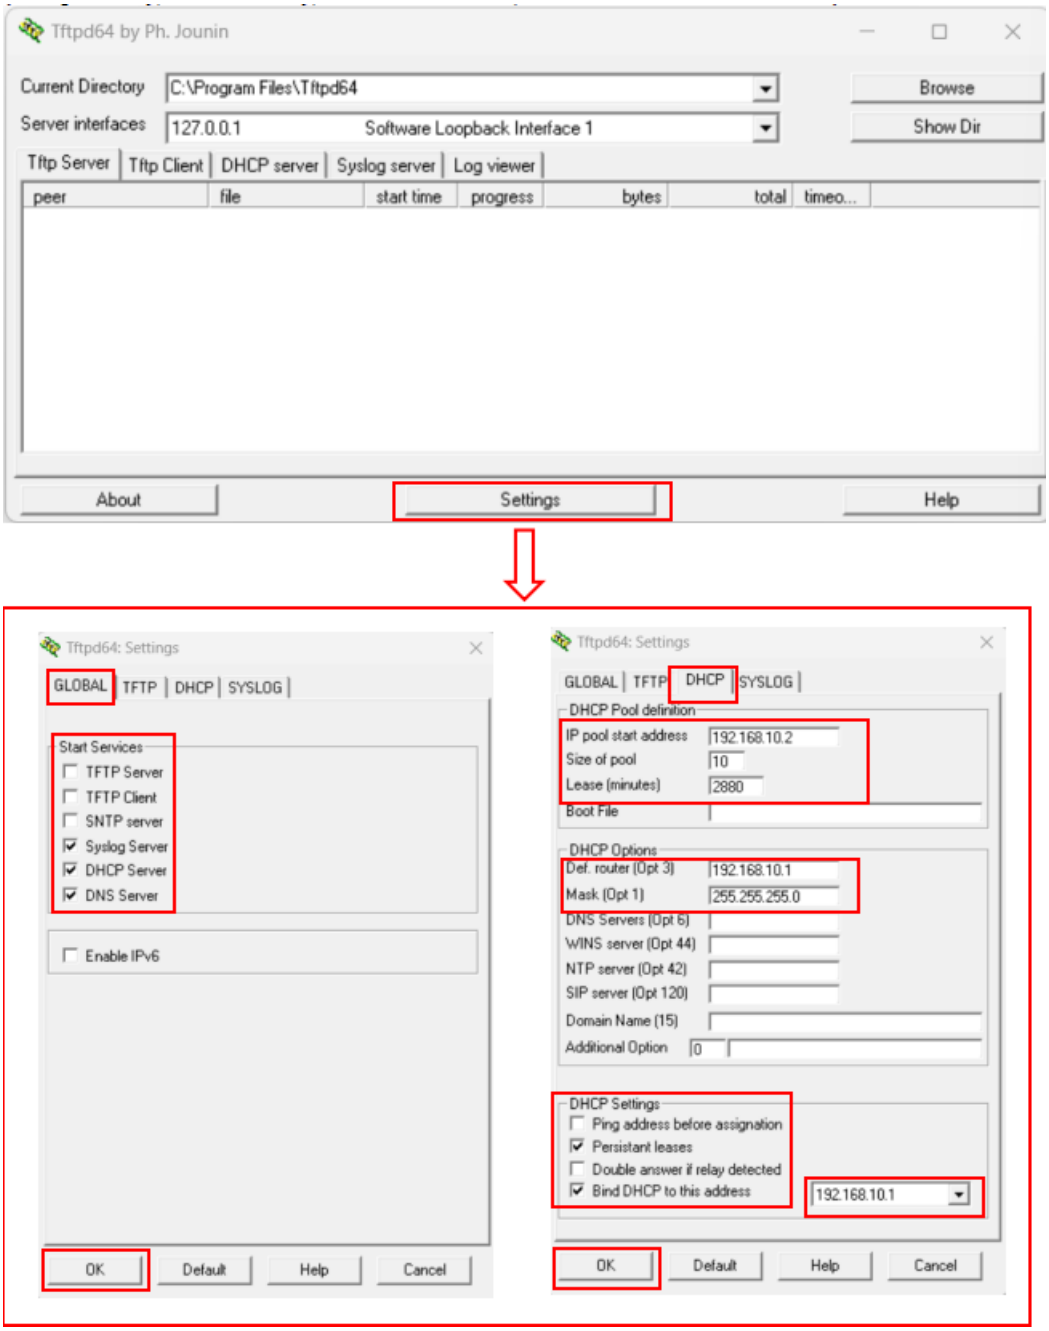


Step 7: Power on the gateway, then connect the Ethernet cabble from the gateway to the laptop through the adapter. Wait for a few seconds, the IP address of the gateway will be displayed in **DHCP server** tab of the Tftpd64 software



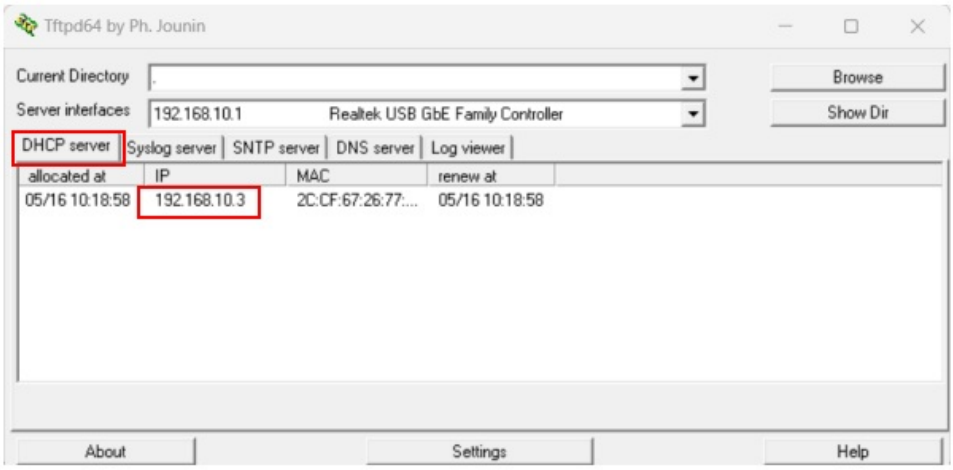


Step 8: Access the gateway's GUI via the IP address and port 4050 (e.g., 192.168.10.3:4050).
If the web browser displays as shown in the image below, it means you have successfully accessed the gateway. Next, refer to the user guide to configure the Wi-Fi and the LoRaWAN Package Forwarder for the gateway.

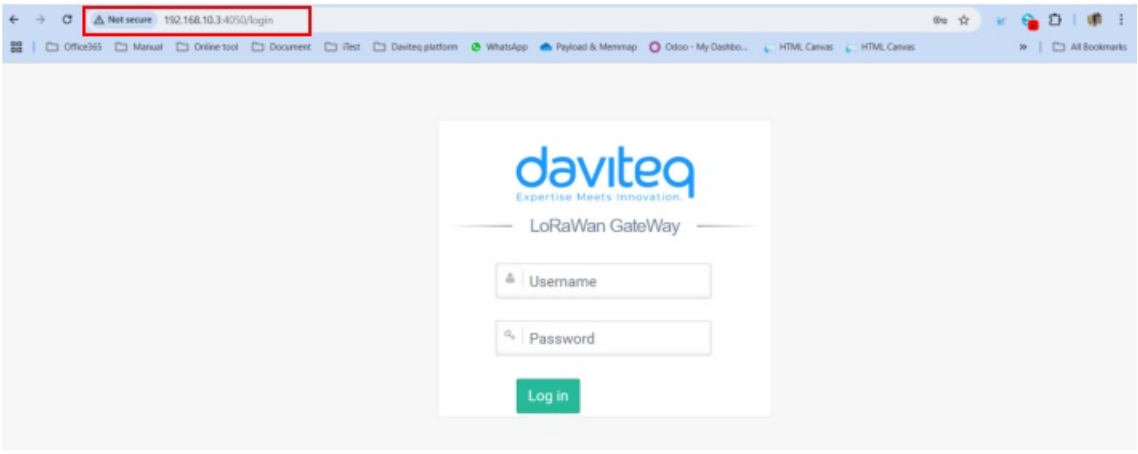

Step 9: After finishing the configuration, please turn the firewall back on for your computer.

Run **Command Prompt** as administrator, then copy and paste the command below to the Command Promt

netsh advfirewall set allprofiles state on

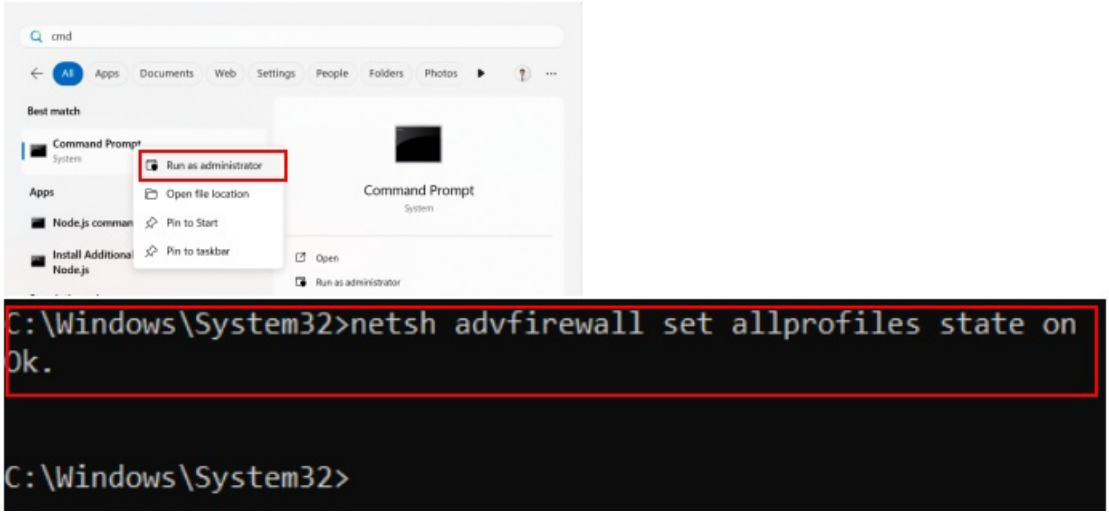

Revision #5
★ Created Tue, Jul 22, 2025 2:39 AM
Updated Mon, Jul 28, 2025 3:07 AM