

# Ammonia Gas Sensor with Analog output AV10-G4-NH3

SKU: AV10-G4-NH3

Doc No: AV10-G4-NH3-DS-EN-10

## Introduction


AV10-G4-NH3 is an electrochemical-type gas sensor with a high sensitivity to low concentrations of NH3 gas, high selectivity, and a stable baseline. It is powered by a power supply of 15..36VDC and gives analog output 0-10VDC for easy integration.

- High accuracy and stability;
- Wide range of Power Supply;
- Filter & Protector;
- Plug & Play.

## Typical Applications

Ambient Gas Monitoring in Facilities, Farm, Building, Factory, City...

- Indoor Air Quality monitoring;
- HVAC Control;
- Greenhouse;
- Smart Agriculture.
- Gas Leak Detector.

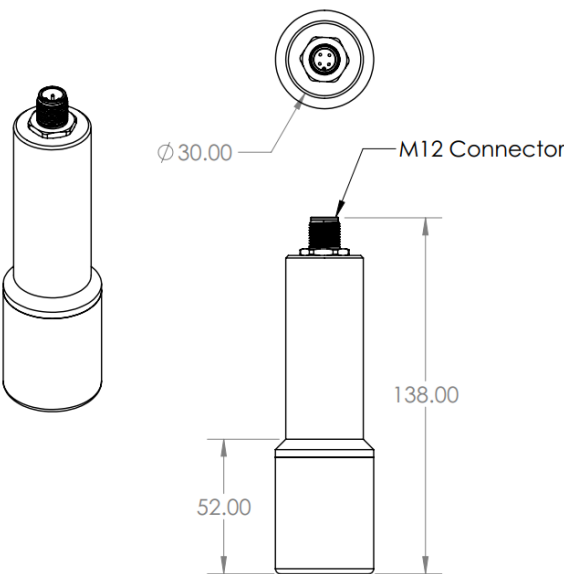

## Specification

SENSOR SPECIFICATION	
Sensor type	Daviteq Seri-4 electrochemical gas sensor
Nominal range	0-1000ppm
Resolution	0.1 ppm
Instability	+/- 0.66 ppm
T90 response time	< 35 s

Repeatability	< 3% of reading
Linearity	5% of full scale
Temperature compensation	Yes
Relative humidity range	15 % to 90 % RH non-condensing
Temperature range	-10 °C to 50 °C
Pressure range	Atmospheric $\pm$ 10%
Expected Operation Life	2 years in clean air
Expected Long-Term Output Drift in air	< 5 % of reading loss per 6 months
Filter & Protector	Nylon filter
Sensor housing / Rating	Plastic / IP67
<b>OTHER SPECIFICATION</b>	
Output	0..10VDC
Power supply	15..36VDC, avg. < 100mA
Connector	M12-female 4-pin Code A
Housing	Thermal Plastic
Housing Rating	IP67 (electronics housing and connector)
Dimension	H138xD30
Net weight	<200 grams

## CROSS SENSITIVITY DATA


The table below does not claim to be complete. Interfering gases should not be used for calibration.

Interfering Gas	Concentration (ppm)	Reading (ppm)
Cl <sub>2</sub>	20	-55
CO	300	0
CO <sub>2</sub>	20000	0
H <sub>2</sub>	200	0
H <sub>2</sub> S	20	7
NO	20	-1
NO <sub>2</sub>	20	-20
SiH <sub>4</sub>	10	0
SO <sub>2</sub>	20	-7

## ORDERING CODE

Item code	Descriptions
AV10-G4-NH3-1000-01	ANALOG OUTPUT 0-10VDC AMMONIA GAS NH <sub>3</sub> SENSOR, 0-1000PPM, 15..36VDC SUPPLY, M12-F CONNECTOR
CALGAS-NH3-02	CALIBRATION CHARGES FOR GAS SENSOR, 2-POINT CALIBRATION

Please select below M12 cable with different lengths	
2M-MM12CAB4X0.25	M12 4PIN MALE ASSEMBLY CONNECTOR WITH SOLDERING TERMINALS AND CODING A AND CONTROL CABLE CU/PVC/OS/PVC 4X0.25MM2, L=2M, ROHS, SHIELD 80%
5M-MM12CAB4X0.25	M12 4PIN MALE ASSEMBLY CONNECTOR WITH SOLDERING TERMINALS AND CODING A AND CONTROL CABLE CU/PVC/OS/PVC 4X0.25MM2, L=5M, ROHS, SHIELD 80%
10M-MM12CAB4X0.25	M12 4PIN MALE ASSEMBLY CONNECTOR WITH SOLDERING TERMINALS AND CODING A AND CONTROL CABLE CU/PVC/OS/PVC 4X0.25MM2, L=10M, ROHS, SHIELD 80%

 [Link for full datasheet:](#)

 [Link for manual:](#)



**Daviteq Technologies Inc**



[www.daviteq.com](http://www.daviteq.com)



[info@daviteq.com](mailto:info@daviteq.com)

🕒 Revision #7

★ Created Sun, Jan 8, 2023 10:17 PM by [Lộc Vĩnh Nguyễn](#)

✎ Updated Mon, Jan 9, 2023 3:45 AM by [Lộc Vĩnh Nguyễn](#)