

How to Create Account Globiots

MN-VIZUO-EN


Sep-2020

1. Functions Change Log

Release Date	Version	Functions Change
Sep-2020	1.0	Create account in Templogger

2. CREATE NEW ACCOUNT

- In Home screen, select menu Administrators → select sub-menu Account Management.

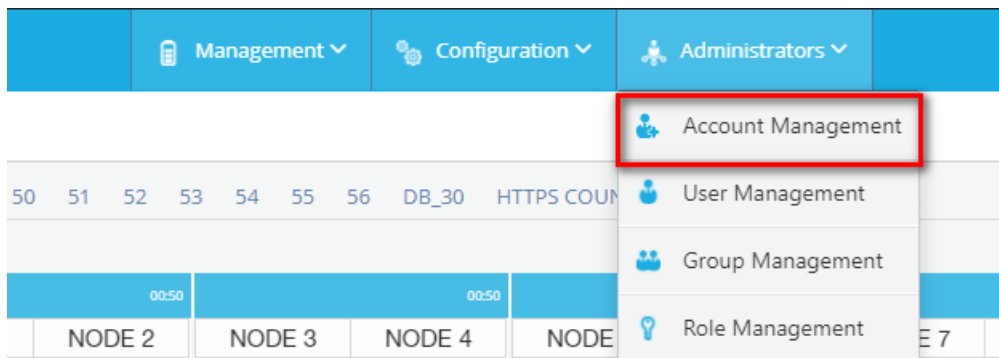

- In screen of account list, click button “Add account” to create new account.

A screenshot of the 'The List Of Accounts' screen. At the top right, there are two buttons: 'Add Account' (highlighted with a red box) and 'Show Account Deleted'. Below the buttons is a search bar. The main content area is titled '+ Add Account - Step 1 of 4'. It contains a form with four tabs: '1 BASIC INFORMATION', '2 ADMIN INFORMATION', '3 PACKAGE INFORMATION', and '4 SUBMIT'. The 'BASIC INFORMATION' tab is active. It contains several input fields: 'Name*' (filled with 'GLOBIOTS'), 'Address*' (filled with 'SO 11, DUONG 2G, KDC NAM HUNG VUONG, PHUONG AN LAC, BINH TAN'), 'Country' (dropdown menu showing 'Vietnam'), 'City/Province' (filled with 'Ho Chi Minh'), 'Postal Code' (filled with '700000'), 'Fax Number' (placeholder 'Please provide fax number'), 'Email Address*' (filled with 'info@deviteq.com'), 'Time Zone*' (dropdown menu showing 'GMT+07:00'), 'Date Format*' (dropdown menu showing 'dd/MM/yyyy'), 'Time Format*' (dropdown menu showing 'HH:mm:ss'), 'First Day Of Week*' (dropdown menu showing 'Monday'), 'Begin Time Of Day' (filled with '00:00'), and 'Status*' (dropdown menu showing 'ACTIVED'). A red rectangular box highlights the entire form area, and a red number '1' is placed next to the 'Email Address*' field. At the bottom of the form are two buttons: 'Cancel' and 'Continue'.

Enter information account into panel (1).

Email: enter email address. Email is unique.

Click button “Continue” to go to step 2.

- Field with mark * must be filled

- In email adress, uppercase and lowercase are the same.
- Select right Time Zone for user.
- After click button “Continue”, screen of step 2 should appear:

+ Add Account - Step 2 of 4

1 BASIC INFORMATION 2 ADMIN INFORMATION 3 PACKAGE INFORMATION 4 SUBMIT

Full Name* Account NAME

Gender Male

Username* globiots

Password* abc@123

Date Of Birth* 01/01/2002

Contact Number 0123654784

Email Address* info@globiots.com

Language English

2

Cancel Back Continue

Enter information of admin user into panel (2):

- Username: Enter username. Username is unique.
- Email: Enter email address. Email is unique.
- Contact Number: Enter phone number. Phone number is unique.
- Click button “Continue” to go to step 3.

- Screen of step 3 should appear:

+ Add Account - Step 3 of 4

1 BASIC INFORMATION 2 ADMIN INFORMATION 3 PACKAGE INFORMATION 4 SUBMIT

Choose Package* FRE-0100

3

Cancel Back Continue

(3) Select package for account.

Click button “Continue” to go to step 4.

- Screen of step 4 should appear:

➤ Add Account - Step 4 of 4

1 ✓ BASIC INFORMATION 2 ✓ ADMIN INFORMATION 3 ✓ PACKAGE INFORMATION 4 SUBMIT

BASIC INFORMATION

Name: GLOBIOTS
 Address: SO 11, DUONG 2G, KDC NAM HUNG VUONG, PHUONG AN LAC, BINH TAN
 Country: Vietnam
 Province: Ho Chi Minh
 Postal Code: 700000
 Fax Number:
 Email Address: info@deviteq.com
 Time zone: Asia/Ho_Chi_Minh
 Date Format: dd/MM/yyyy
 Time Format: HH:mm:ss
 First Day Of Week: Monday
 Begin Time Of Day: 00:00
 Keep Alive Time: 5 minutes
 Realtime Refresh Time: 1 second
 Status: ☒

ADMIN INFORMATION

Full Name: Account NAME
 Username: globiots
 Gender: Male
 Date Of Birth: 01/01/2002
 Contact Number: 0123654784
 Email Address: info@globiots.com

PACKAGE INFORMATION

Name: FRE-0100
 Limited User: 5
 Limited Device: 5

Cancel Back Save

(4.1) Display basic information of account in step 1.

(4.2) Display information of admin user in step 2.

(4.3) Display assigned package information in step 3.

Click button "Save" to save configuration.

- After click button "Save", confirmation screen should appear:

Do you really want to add account 'GLOBIOTS'?

Cancel OK

Click "OK" to finish.

- After successfully create new account, an admin user of account is also created.

- Number of used user of account increases by one for admin user.

- Information of admin user should be in user list.

3. CREATE NODE ASSIGN TO ACCOUNT

3.1. Node Definition

In Organization Chart Panel, Node is used to create Organization Chart. Node name should be geographical area, type of energy or responsible person. A Node includes one or more sub-Node and Device


3.2. Organization Chart

To close or open “Organization Chart” panel, you can click  on left corner of screen Organization Chart page includes all Node and Device in system:



- Node name
- Number using device of account/Max number device of account

Right click on Node name, menu of Node displays:

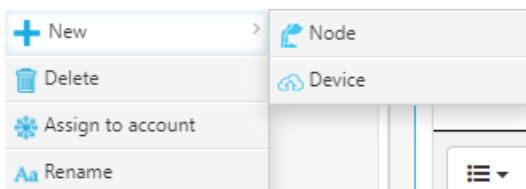


- New: Create new Node, Device
- Delete: Delete Node
- Assign to account: Assign Node and sub-Node to account
- Rename: Change name of Node

3.3. Create New Node

To Create a sub-Node:

- (1) Select Node
- (2) Right click and select “New”
- (3) Click “Node” to create new Node

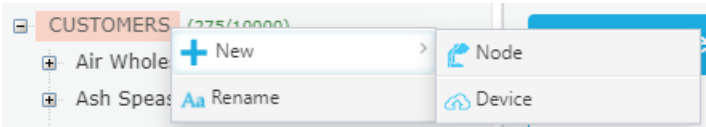

+ Add Node

Name*

NODE GLOBIOTS

Save

Click Save node


Do you really want to add node 'NODE GLOBIOTS'?

Cancel

OK

3.4. Assign Node to account

- In Organization Chart panel , select Node to assign to new account created, right click Node name → select “Assign to account” : A list account displays:

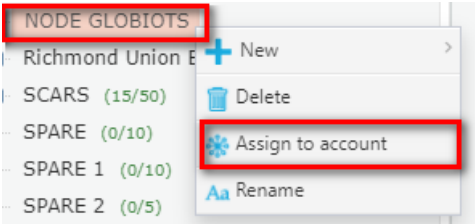

NODE GLOBIOTS: Node is created in step 2.3

Assign node 'NODE GLOBIOTS'

Show 10 Rows

Search

	Account name	Using User	Using Device	Status	
<input checked="" type="checkbox"/>	GLOBIOTS	1/5	0/5	<input checked="" type="checkbox"/>	<div>Assign</div>

Showing 1 to 1 of 1 entries

First

Previous

Next

Last

- Click “Assign” button to assign Node to account Or Click “Unassign” to un-assign Node from account.

Assign node 'NODE GLOBIOTS'				
Show	10	Rows	Search	
	Account name	Using User	Using Device	Status
<input checked="" type="checkbox"/>	GLOBIOTS	1/5	0/5	<input checked="" type="checkbox"/> Unassign


Showing 1 to 1 of 1 entries

[First](#)
[Previous](#)
[Next](#)
[Last](#)

4. CREATE USER

4.1. Create User

- Login with the admin user created in step 1
- In Home screen, click menu Administrators → select sub-menu User Management

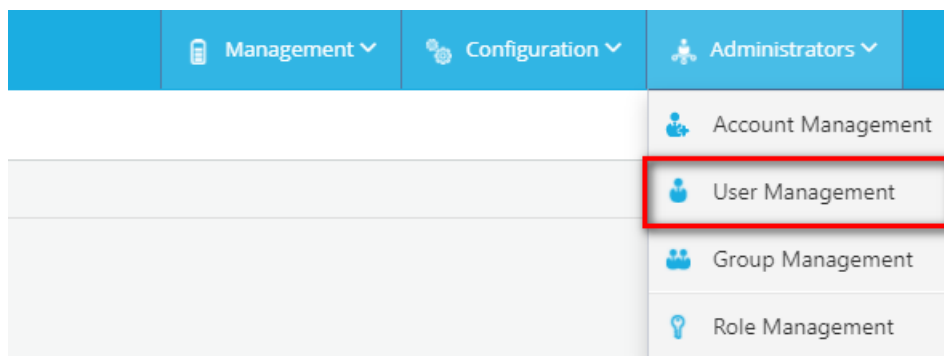

- In screen of user list, click button “Add user” to add new user.

The List Of Users

Show
100
Rows

Search

Full Name	Email	Contact Number	Account	Active
No data available in table				

Showing 0 to 0 of 0 entries

First
Previous
Next
Last

+ Add User - Step 1 of 3

1
BASIC INFORMATION
2
AUTHENTICATION
3
SUBMIT

Full Name*
staff 1

Gender
Male

Date Of Birth
01/01/2002

Contact Number
+84

Language
English

Cancel
Continue

Enter basic information into panel (1).

- Contact Number: Enter contact number. The number is unique.
- Click button “Continue” to go to step 2.

- After click button “Continue”, screen of step 2 should appear:

+ Add User - Step 2 of 3

1 ✓ BASIC INFORMATION 2 AUTHENTICATION 3 SUBMIT

Email*

Username*

Password*

Status

2

Enter information for user to sign-in into panel (2):

- Email: enter email address. Email is unique.
- Username: enter username for sign in. Username is unique. Username has at least 6 characters.
- Password: default password is "abc@123". User must change password when user sign in in the first time.
- Click button "Continue" to go to step 3.

- Enter full information for user.

- Uppercase and lowercase of email and username are the same.

Example: username "USERNAME1" is the same as username "username1".

- Screen of step 3 should appear:

+ Add User - Step 3 of 3

1 ✓ BASIC INFORMATION 2 ✓ AUTHENTICATION 3 SUBMIT

BASIC INFORMATION

Full Name: staff 1

Gender: Male

Date Of Birth: 01/01/2002

Contact Number: +84

3

AUTHENTICATION

Email: staff1@store.com

User Name: staff1

Status: ☒

4

(3) Display basic information of user in step 1.

(4) Display information for sign in in step 2.

Click button "Save" to save information.


After click button "Save", confirmation screen should appear:

Do you really want to add user 'staff 1'?

✕

4.2. Create Group

- Group is used to assign authorities to users.
- In Home screen, select menu Administrators → select sub-menu Group Management

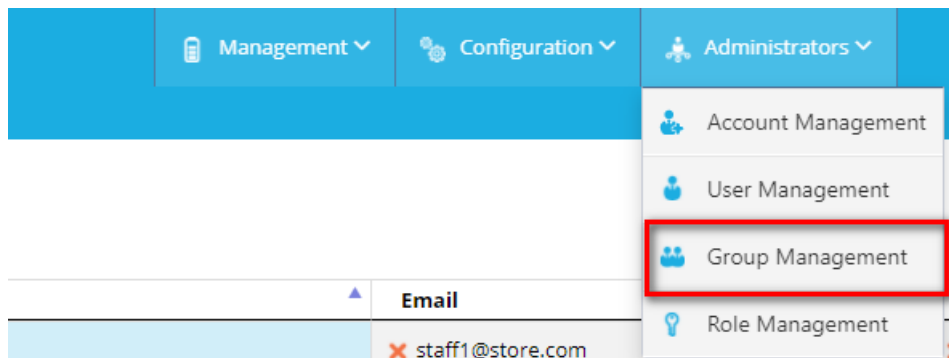

- In screen of group list, click button “Add Group” to create new group of account.

A screenshot of a web application interface titled 'The List Of Groups'. It includes a search bar, a table with columns 'Group Name' and 'Description', and pagination controls. A red box highlights the 'Add Group' button in the top right corner. Below the table, a section titled '+ Add Group - Step 1 of 5' contains a progress bar with seven steps: '1 BASIC INFORMATION', '2 FUNCTION', '3 NODE', '4 USER', '5 DASHBOARD', '6 REPORT', and '7 SUBMIT'. The 'BASIC INFORMATION' step is active. A red box highlights the input fields for 'Group Name*' (containing 'Group 1') and 'Description' (containing 'Group 1'). A red number '1' is placed next to the 'Continue' button at the bottom right of the form.

Enter basic information of group into panel (1).

- Group Name: Enter group name. Group name is unique.
- Click button “Continue” to go to step 2.

- After click button “Continue”, screen of step 2 should appear:

A screenshot of a web application interface showing a table for selecting functions for a group. The table has two columns: 'Function' and 'Permission'. The 'Function' column lists various system functions, and the 'Permission' column contains input fields for selecting the appropriate permission level. The functions listed are: Schedule Report, Device Management, Action Log Management, Alarm Management, Node Management, Device Management, Import/Export Raw Data, OPERATOR_ROLE, Report Management, User Management, Event Management, Role Management, Group Management, Account Management, Memmap Management, SMS Profile Management, Dashboard Management, Package Management, and Parameter Management. At the bottom of the table, there are three buttons: 'Cancel', 'Back', and 'Continue'.

- Select assigned functions for group in area

- Screen of step 3 should appear:

- (2) Display available nodes of account. Tick nodes to assign to group.
- Click button "Continue" to go to step 4.

- Screen of step 4 should appear:

- (1) Display list of users. The users have not been assigned to the group.
- (2) Display list of users which has already been assigned to the group.
- Button "Assign": click to assign selected user to group. After click "Assign" button, selected user should be in the list in panel (2).
- Button "Remove": remove user from group. After click button "Remove", selected user should be in the list in panel (1).

- Click button “Continue” to go to step 5.

- Screen of step 5 should appear:

+ Add Group - Step 5 of 7

1 ✓ BASIC INFORMATION 2 ✓ FUNCTION 3 ✓ NODE 4 ✓ USER 5 DASHBOARD 6 REPORT 7 SUBMIT

Dashboards Of Group

Show 10 Rows Search

Name	Actions
No data available in table	

Showing 0 to 0 of 0 entries

First Previous Next Last

List Of Dashboards

Show 10 Rows Search

Actions	Name
No data available in table	

Showing 0 to 0 of 0 entries

First Previous Next Last

Cancel Back Continue

- (1) Display list of Dashboard of signing in group. The Dashboard has not been assigned to group.
- (2) Display list of Dashboard of signing in group. The Dashboard has already been assigned to group.
- Button "Assign": click to assign dashboard to group. Assigned dashboard should be in panel (2).
- Button "Remove": remove dashboard out of group. Removed dashboard should appear in panel (1).
- Click button "Continue" to go to step 6.

- Screen of step 6 should appear to view Summary information of group from step 1 to step 8.

- Click button "Save" to save information.
- After click button "Save", confirmation screen should appear:

Do you really want to add group 'Group 1'?

Cancel OK

- Click button "OK" to finish.

5. Support Contacts

<p>Distributor in Malaysia</p> <p>AVO.png</p> <p>AVO Technology Sdn. Bhd. Official Website: www.avo.com.my No. 17, Jalan 3/23A, Taman Danau Kota, 53300 Kuala Lumpur, Wilayah Persekutuan Kuala Lumpur, Malaysia General : +603-4143 2288 Mobile : +012-376 7181 Fax : +603-4143 3388</p>	<p>Distributor in Australia and New Zealand</p> <p>temploggerlogo.png</p> <p>Templogger Pty Ltd Tel: 1800 LOGGER Email: contact@templogger.net</p>
<p>Manufacturer</p> <p>logo.jpg</p> <p>Daviteq Technologies Inc. No.11 Street 2G, Nam Hung Vuong Res., An Lac Ward, Binh Tan Dist., Ho Chi Minh City, Vietnam. Tel: +84-28-6268.2523/4 (ext.122) Email: info@daviteq.com www.daviteq.com</p>	

Revision #4

★ Created Tue, Dec 15, 2020 12:00 AM by Admin

✎ Updated Tue, Dec 22, 2020 9:35 PM by Kiệt Anh Nguyễn