

# WIND SPEED SENSOR WSP

SKU: WSP

Doc No: WSP-DS-EN-10

## Introduction

WSP is the Wind Speed Sensor with carbon fiber material. Sensor with high weather resistance, high durability, corrosion resistance and water resistance.

- Weather resistant;
- High durability;
- High data transmission efficiency and reliable.

## Typical applications


- Weather Station;
- Ship navigation;
- Aviation;
- Weather buoys;
- Wind turbines.

WIND SPEED SENSOR  
WSP



WSP-H1.PNG

DIMENSION DRAWING OF SENSOR  
(Unit: mm)

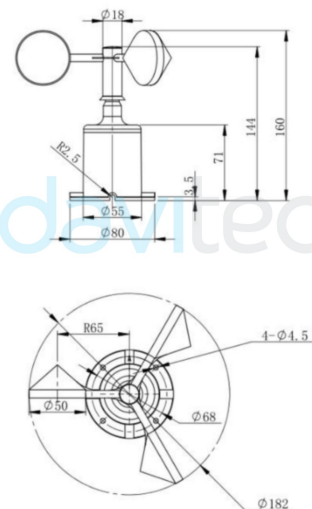

WSP-H2.PNG


## Specification

Measure range	0-70m/s( Other can be custom made)
Start wind speed	0.2m/s
Response time	<0.5s
Resolution	0.1m/s
Accuracy	$\pm(0.2+0.03V)$ m/s, V means wind speed
Output	0..5VDC
Power supply	12..24VDC
Power consumption	$\leq 0.3$ W

Working temperature	-20~60°C
Working humidity	≤100%RH
Cable specifications	2m 3-wire system (analog signal)

## Ordering Code

Item code	Descriptions
WSP-01-ANALOG	WIND SPEED SENSOR, 0-70 M/S, CARBON FIBER, 0-5VDC OUTPUT, 12-24VDC, WITH CABLE AND CONNECTOR
MBRTU-WSP-01	WIND SPEED SENSOR, CARBON FIBER CUPS, RS485/MODBUSRTU, 12-24VDC SUPPLY, 0-45M/S, IP65

 [Link for full datasheet:](#)

 [Link for manual:](#)

**daviteq**

Daviteq Technologies Inc

 [www.daviteq.com](http://www.daviteq.com) |  [info@daviteq.com](mailto:info@daviteq.com)

🕒 Revision #7

★ Created Mon, Apr 12, 2021 1:19 AM by [Kiệt Anh Nguyễn](#)

✎ Updated Mon, Apr 26, 2021 7:23 PM by [Lộc Vĩnh Nguyễn](#)